

## General Purpose, Glass Reinforced, Strapping Tape

### Technical Data

September 12, 2003

#### Product Description

General purpose, glass reinforced, strapping tape

#### Typical Applications


Light duty strapping, packaging, bundling and palletizing.

#### Applicable Specifications

N/A

#### Features & Benefits

Resists moisture and solvents. Good adhesion, quick stick and shock resistance. Backing resists splitting and cracking.

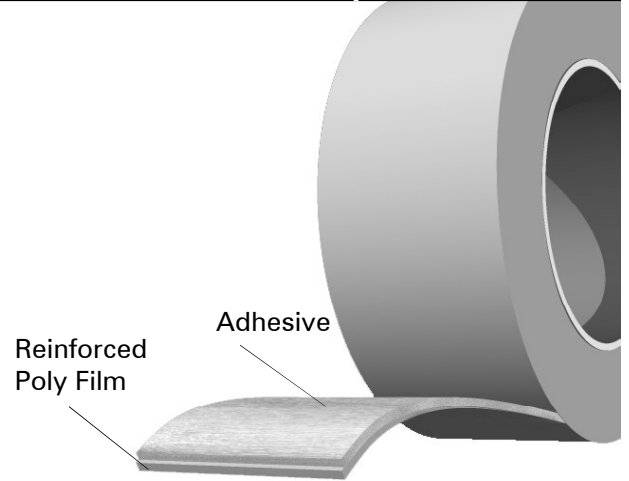

Reinforced Poly Film

Adhesive

#### Product Construction

Backing: fiberglass re-inforced, polypropylene film

Adhesive: synthetic rubber resin

Physical Properties	Standard	Metric	ASTM Test Method
Tensile Strength	100 lbs./in.	172.37 N/10mm	D 3759/D 3715M
Adhesion to Steel	74 oz./in.	7.97 N/10mm	D 3330/D 3330M
Thickness	4.6 mils	.117 mm	D 3652/D 3652M
Elongation	3.9%	3.9%	D 3759/D 3715M
Service Temperature Range	Up to 150°F	Up to 66°C	

Values obtained from tests do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. Shurtape recommends the user to determine whether the product is fit for a particular purpose and is suitable for the user's method of application.

#### Storage & Usage Conditions

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Storage temperature of 40° - 80° F (4° - 26° C) and 40 to 50 percent relative humidity are recommended. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

**Shurtape Technologies, Inc.**  
 PO Box 1530, Hickory, NC 28603-1530  
 Phone 828/322-2700 Fax 828/322-4419  
[www.shurtape.com](http://www.shurtape.com)